

Analog electromechanical time switch APC-D1, APC-DR1

Advantages

- The APC time switch controls any electrical installation by means of daily programs.
- Without (D1) or with (DR1) battery backup.
- Manual switch with permanent ON position.
- Supply voltage : AC 230V
- Sealable cover of frontal panel
- Output contact : 1x NO 16A
- Simple dial time setting. Minimum switching time is 15 min.
- 1 module, DIN rail mounting.



Analog electromechanical time switch APC-D1, APC-DR1

Type	I _n [A]	Code No.	Weight [g]	Packaging [pcs]
APC-D1	16	002472001	87	1/10
APC-DR1	16	002472002	87	1/10

Multifunction relay SMR-T, SMR-H, SMR-B

Advantages

- Multifunction relay designated for installation into a wiring box, under wall-switch into an existing installation (SMR-T doesn't need neutral to function)
- Fast solution for exchanging standard wall-switch for a switch controlled by time or for a memory relay controlled by a button

SMR-T



- 3-wire connection, works without neutral wire
- Output: 10-160 VA (resistive load)
- It cannot be used for fluorescent lights and energy saving lights (loads of capacitive type)

SMR-H

- 4-wire connection
- Output 0-200 VA
- It cannot be used for fluorescent lights and energy saving lights (loads of capacitive type)

SMR-B

- 4-wire connection
- 10 functions
- Output contact 1x 16A / 4000 VA, 250V AC1
- Enables switching of fluorescent lights and also energy saving lights (see instruction manual technical data)
- Independent galvanically separated input AC/DC 5-250 V (for example for control from a security system)




Multifunction relay SMR-T, SMR-H, SMR-B

Type	Code No.	Weight [g]	Packaging [pcs]
SMR-T	002470004	29	1/14
SMR-H	002470005	31	1/14
SMR-B	002470021	53	1/14


Analog electromechanical time switch APC-D1, APC-DR1

Technical data		
	APC-DR1	APC-D1
Supply voltage	230V AC	230V AC
Power reserve	yes (100 hrs)	no
Dial/minimum switching time	15 min	15 min
Operating accuracy	+/- 1s/day at 22°C	+/- 1s/day at 22°C
Program	Daily	Daily
Output contact	1 x NO	1 x NO
Switching capability	16A 125/250V AC1	16A 125/250V AC1
Power consumption	0,5W	0,5W
Operating temperature	-25...+55°C	-10...+45°C
Mounting	DIN rail EN 60715	DIN rail EN 60715
Protection category	IP20	IP20
Overvoltage category	II.	II.
Dimensions	90 x 17,5 x 66	90 x 17,5 x 66
Standards	EN 60730-2-7	EN 60730-2-7


Dimensions

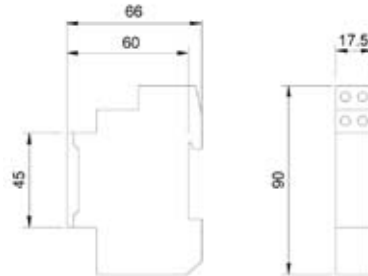

Connection



Programming



Multifunction relays SMR-T, SMR-H, SMR-B

Technical data			
	SMR-T	SMR-H	SMR-B
Number of functions	9	9	10
Connection	3-wires, without neutral	4-wires, with neutral	4-wires, with neutral
Supply voltage	AC 230 V / 50-60 Hz		
Consumption (no operation/make)	0,8/3 VA	0,8/3 VA	3 VA
Supply voltage tolerance	- 15%; + 10%		
Time ranges	0,1 s-10 days	0,1 s-10 days	x
Time setting via	via rotary switch and potentiometer	via rotary switch and potentiometer	x
Time deviation	10% mechanical setting	10% mechanical setting	x
Repeat accuracy	2% set value stability	2% set value stability	x
Temperature coefficient	0,1%, °C at 20 °C	0,1%, °C at 20 °C	x
Output	10-160 VA	0-200 VA	10-300 VA
Resistive load	10-100 VA	0-100 VA	10-150 VA
Inductive load			
Controlling	AC 230 V		
Voltage	3 mA		
Current			
Impulse length	min. 50 ms, max. unlimited		
Operating temperature	-10...+55 °C		
Operating position	any		
Mounting	free at connecting wires		
Protection degree	IP 30 from front panel		
Overvoltage category	2		
Pollution degree	F1 A / 250 V	F1 A / 250 V	F1,6 A / 250 V
Fuse			
Outlets	3 x solid wires 0,75 mm ² length 90 mm max. 10 pcs.		
Glow-laps in button	48,5 x 48,5 x 13 mm		
Dimensions	EN 61010-1		
Standards			